



Bano swivel toilet



The seat of the Bano swivel toilet can easily be rotated 290 degrees, which simplifies access to the toilet. The height of swivel toilet is adjusted using the control panel integrated in the handles.

Poorly adapted bathrooms in private homes create difficult obstacles in situations where the user has to be moved. The Bano swivel toilet removes these obstacles and sets a new standard for bathroom accessibility. Instead of the user having to adapt to the bathroom, the bathroom will adapt to the user, resulting in an increased sense of security, greater independence and greater dignity.

Functionality

Swivel toilet


The toilet seat can easily be rotated using a trigger mechanism integrated in the grab bars. The bars can be lowered and raised. The back rest and toilet seat cover can easily be removed for cleaning.



Swivel toilet Module

Users who have walking difficulties rely on being able to raise the toilet so that their legs do not touch the floor in order to be able to rotate it safely. The swivel toilet can be lowered and raised by 200mm, and has a lifting capacity of 300kg.

The electrical height adjustment function is easily operated from an integrated panel in both grab bars. The control system for the height adjustment function is integrated into the wall module. The module is flexible enough to be installed in existing bathrooms in combination with both floor-mounted and wall mounted toilets.

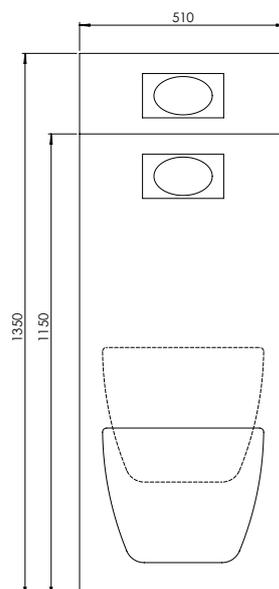

Materials



Bano swivel toilet is made from robust materials that can withstand considerable loads and a lot of wear and tear. Innovative solutions provide optimum functionality and comfort. The porcelain toilet bowl is designed to be easy to clean.

All surfaces are made from innovative composite materials. This improves user comfort and helps to avoid a cold, unpleasant experience. The toilet seat is designed with comfort in mind, and the surface is easy to clean.

The cistern is made from anti-corrosion steel with a vacuum-moulded composite cover.

Technical specifications

Product number:	5920
Weight:	35kg
Maximum load:	500kg
Maximum lifting capacity:	300kg
Maximum load, grab bars:	250kg
Height adjustment:	200mm
Turning circle grab bars:	850mm

Dimension inside toilet seat 281 x 232mm
Electrical height adjustment buttons in both grab bars
Rotation buttons in both grab bars
Flush volume: Dual flush 3-6 l - Adjustable to 4,5-7 l
Flush speed: 1,8 l/s - Adjustable to 2,2 l/s
Power supply: 230V IPX6

changes may occur.

Colour codes:

Cistern cover: RAL9016
Grab bars and seat: RAL 7001



Bano swivel toilet with flushing and drying function

Bano swivel toilet can be supplied with a flushing and drying function. A simple and easy-to-use solution for a comfortable toilet visit, cleansing with a warm and comfortable water spray.

Easy to use

Fully automatic cleaning cycle with just a push of a button. Automatic pre- and post cleaning of shower nozzle with fresh water.

Effective cleaning

Comfortable cleansing with a warm jet of water.

Comfortable dryer function

After the cleansing cycle, the warm air dryer starts drying with a comfortable air temperature.

No need for descaling

The cleansing system is emptied of water after each cleansing, which eliminates the risk of calcification. As a result, Bano swivel toilet with flushing and drying function does not need regular servicing or filling of descaling agents.




Technical specifications

Product number:	5930
Shower duration:	180s
Drying duration:	180s
Protection rating:	IPX6
Protection class:	1
Rated voltage:	230V AC
Mains frequency:	50Hz
Input current:	1200W
Flow pressure:	1,5-10 bar
Operating temperature:	5-40°C
Water temperature factory set:	37°C
Water flow rate:	0,5 l/min

Changes may occur.




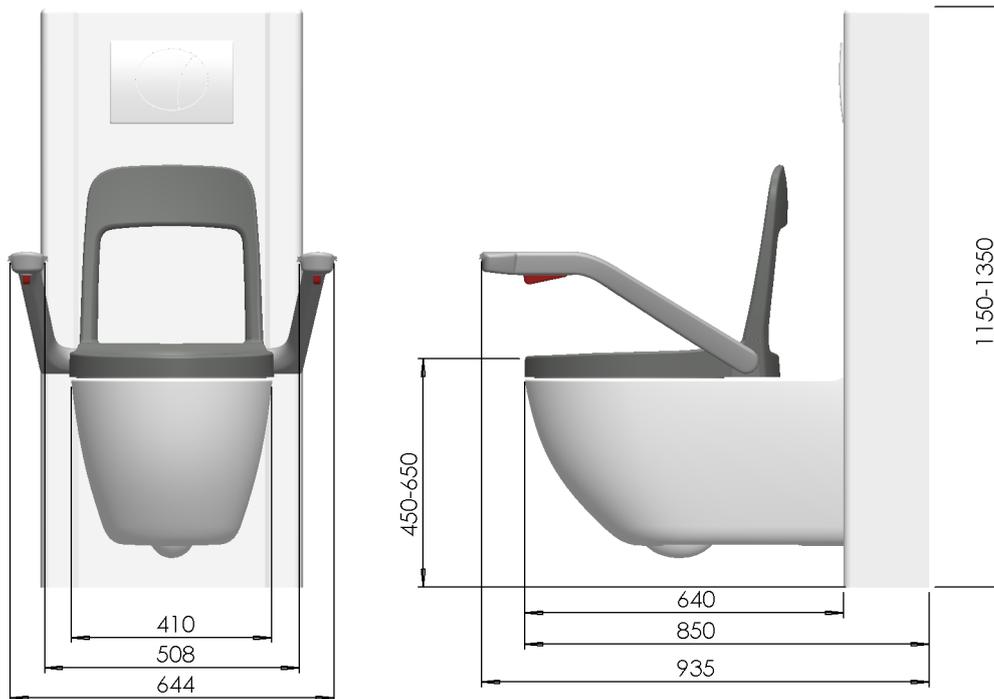

Ø850mm



Ø805mm

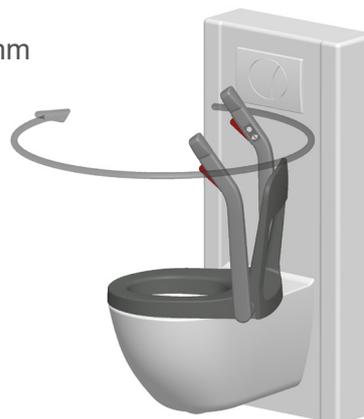

Contact

Bano Home Care

Ingelin Mari Rød
Occupational therapist
Tel.: +47 97 11 51 00
ingelin@bano.no

Mie Damhagen Elvsaa

Physiotherapist
Tel.: +47 93 20 77 87
mie@bano.no

Bano Project

Daniel Nesse
Sales Manager
Physiotherapist
Tel.: +47 95 97 87 60
daniel@bano.no

Veronica Silden Orth

Project Manager
Tel.: +47 94 81 98 57
vs@bano.no

Head office

Bano AS
Industrivegen 22
NO-6823 Sandane
Tel.: +47 57 86 98 00
post@bano.no
www.bano.no



In the event of a manufacturing defect, Bano gives the customer the right to exchange the product for a corresponding product, or a product with corresponding properties, for three years from the date of installation.